



GENERAL NOTE:	DEMOLITION (DASHED LINE INDICATES DEMOLITION ITEMS)	DEMOLITION (DASHED LINE INDICATES DEMOLITION ITEMS)
1. REFER TO MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS FOR EXTENT OF DEMOLITION REQUIRED FOR M.E.P. ITEMS.	▲ REMOVE EXISTING OVERHEAD DOOR AND ALL RELATED COMPONENTS WITH CARE. STORE IN SECURE PLACE FOR FUTURE REUSE.	▲ REMOVE EXISTING DOORS, HINGES, CLOSERS AND ASSOCIATED DOOR HARDWARE IN THEIR ENTIRETY. THE EXISTING ALUMINUM STOREFRONT FRAME, SILL-CUTS AND THRESHOLDS ARE TO REMAIN.
2. INFORMATION SHOWN IN THIS DRAWING PACKAGE IS BASED ON INFORMATION PROVIDED BY OWNER AND FIELD OBSERVATION. SOME DISCREPANCIES BETWEEN DRAWING AND ACTUAL CONDITION MAY EXIST. CONTRACTOR SHALL NOTIFY OWNER OR ARCHITECT OF ANY MAJOR UNEXPECTED CONDITIONS AND/OR DIFFERENCES THAT WILL BE SIGNIFICANTLY AFFECT THE FINAL PRODUCT.	▲ REMOVE EXISTING FINISHED FLOOR AND METHOD OF ATTACHMENTS. PREPARE SUBFLOOR TO RECEIVE NEW CONSTRUCTION.	
3. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS PRIOR TO COMMENCEMENT OF ANY DEMOLITION WORK.	▲ REMOVE EXISTING GLAZING. PREPARE EXISTING ALUMINUM FRAME TO RECEIVE NEW SPANDREL PANEL.	
4. G.C. SHALL COORDINATE WITH ALL OTHER DISCIPLINES PRIOR TO COMMENCEMENT OF WORK TO VERIFY LIMITS OF WORK. IF CONFLICT EXISTS CONTACT ARCHITECT(S).	▲ REMOVE EXISTING CONCRETE STAIR AND ALL RELATED COMPONENTS. BACKFILL HOLE WITH COMPACTED DIRT. PREPARE FOR NEW CONCRETE SIDEWALK.	
	▲ REMOVE EXISTING GLAZING WITH CARE.	
	▲ REMOVE EXISTING WALL LOW WALL IN ITS ENTIRETY WITH CARE - SALVAGE EXTERIOR BRICKS FOR REUSE.	
<b>RENOVATIONS</b>	▲ REMOVE EXISTING FOLDING PARTITION WALL AND ALL RELATED COMPONENTS WITH CARE. RETURN TO OWNER FOR THEIR FUTURE USE.	
▲ INFILL EXISTING OPENING TO MATCH ADJACENT (EXISTING) WALL.	▲ REMOVE EXISTING NONESSENTIAL MACHINE SHOP EQUIPMENT HANGING ABOVE, MOUNTED ON WALLS, AND PROTRUDING UP FROM FLOOR IN ITS ENTIRETY - COORDINATE WITH MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS.	
▲ EXISTING FUTURES TO REMAIN. CHECK FOR PROPER WORKING ORDER. CLEAN AND SANITIZE TO LIKE NEW CONDITION.	▲ REMOVE EXISTING LIGHT FIXTURES, ACoustICAL CEILING TILES, SUSPENSION SYSTEM AND ALL RELATED COMPONENTS IN ITS ENTIRETY.	
▲ EXISTING TOILET PARTITION TO REMAIN. CHECK FOR PROPER FUNCTION AND CONDITION TO ACHIEVE LIKE NEW CONDITION.	▲ REMOVE EXISTING ROLL UP DOOR AND ALL RELATED COMPONENTS WITH CARE. RETURN TO OWNER FOR THEIR FUTURE USE.	
▲ EXISTING DRAWING POSITION TO REMAIN. CHECK FOR PROPER FUNCTION. CLEAN AND SANITIZE TO LIKE NEW CONDITION.	▲ REMOVE EXISTING PLUMBING FITTINGS AND ALL RELATED COMPONENTS IN ITS ENTIRETY. REFER TO PLUMBING DRAWINGS FOR EXTENT OF DEMOLITION.	
▲ REMOVE EXISTING RECEPTIONIST DESK WITH CARE. STORE IN SAFE. SECURE PLACE UNTIL IT CAN BE REINSTALLED AT A LATER DATE AT ITS NEW LOCATION. RECONDITION EXISTING DESK TO LIKE NEW. REFER TO DETAILS.	▲ REMOVE EXISTING ELECTRICAL BOX AND ALL RELATED COMPONENTS IN ITS ENTIRETY. REFER TO ELECTRICAL DRAWINGS FOR EXTENT OF DEMOLITION.	
▲ EXISTING DOCK LEVELER TO REMAIN. CHECK FOR PROPER WORKING ORDER.	▲ REMOVE EXISTING TOILET, LAVATORY, SINK, AND ALL RELATED COMPONENTS. COORDINATE WITH MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS FOR EXTENT OF DEMOLITION.	
▲ RAISE EXISTING LOADING DOOR FLOOR ELEVATION TO MATCH INTERIOR FLOOR ELEVATION FINISHED PRODUCT TO MATCH TYPICAL NEW FINISHED FLOOR.	▲ REMOVE EXISTING LOCKERS AND ALL RELATED COMPONENTS WITH CARE. RETURN TO OWNER FOR FUTURE USE. CHECK LOCKERS FOR PROPER FUNCTION AND RECONDITION TO LIKE NEW.	
▲ PATCH SANSICOT AREA WITH LIKE MATERIAL AND FINISH - COORDINATE WORK WITH FINISH FLOOR CONTRACTOR, PLUMBING CONTRACTOR AND ALL APPLICABLE DISCIPLINES.	▲ REMOVE EXISTING FURNITURE AND ALL RELATED COMPONENTS IN ITS ENTIRETY.	
<b>DEMOLITION (DASHED LINE INDICATES DEMOLITION ITEMS)</b>	▲ REMOVE EXISTING DOCK LEVELER AND ALL RELATED COMPONENTS RETURN TO OWNER FOR THEIR FUTURE USE. INFILL HOLE CREATED BY DOCK LEVELER TO ACHIEVE A LEVEL, FUNCTIONING STRUCTURE.	
▲ REMOVE EXISTING WALL AND ALL RELATED COMPONENTS IN ITS ENTIRETY.	▲ SAW CUT AND REMOVE EXISTING CONCRETE FLOOR SLAB WHERE INDICATED TO ACCOMMODATE NEW SANITARY PIPING. COORDINATE WITH PLUMBING DRAWINGS.	
▲ REMOVE EXISTING DOOR AND FRAMES WITH CARE. STORE IN SECURE LOCATION FOR REUSE.	▲ SAW CUT AND REMOVE EXISTING CONCRETE FLOOR SLAB WHERE INDICATED TO ACCOMMODATE NEW SANITARY PIPING. COORDINATE WITH PLUMBING DWGS.	
▲ REMOVE EXISTING BORROWED LIGHTS WITH CARE. STORE IN SECURE PLACE FOR REUSE.		
▲ REMOVE EXISTING DOOR FRAME AND ALL RELATED COMPONENTS IN ITS ENTIRETY.		

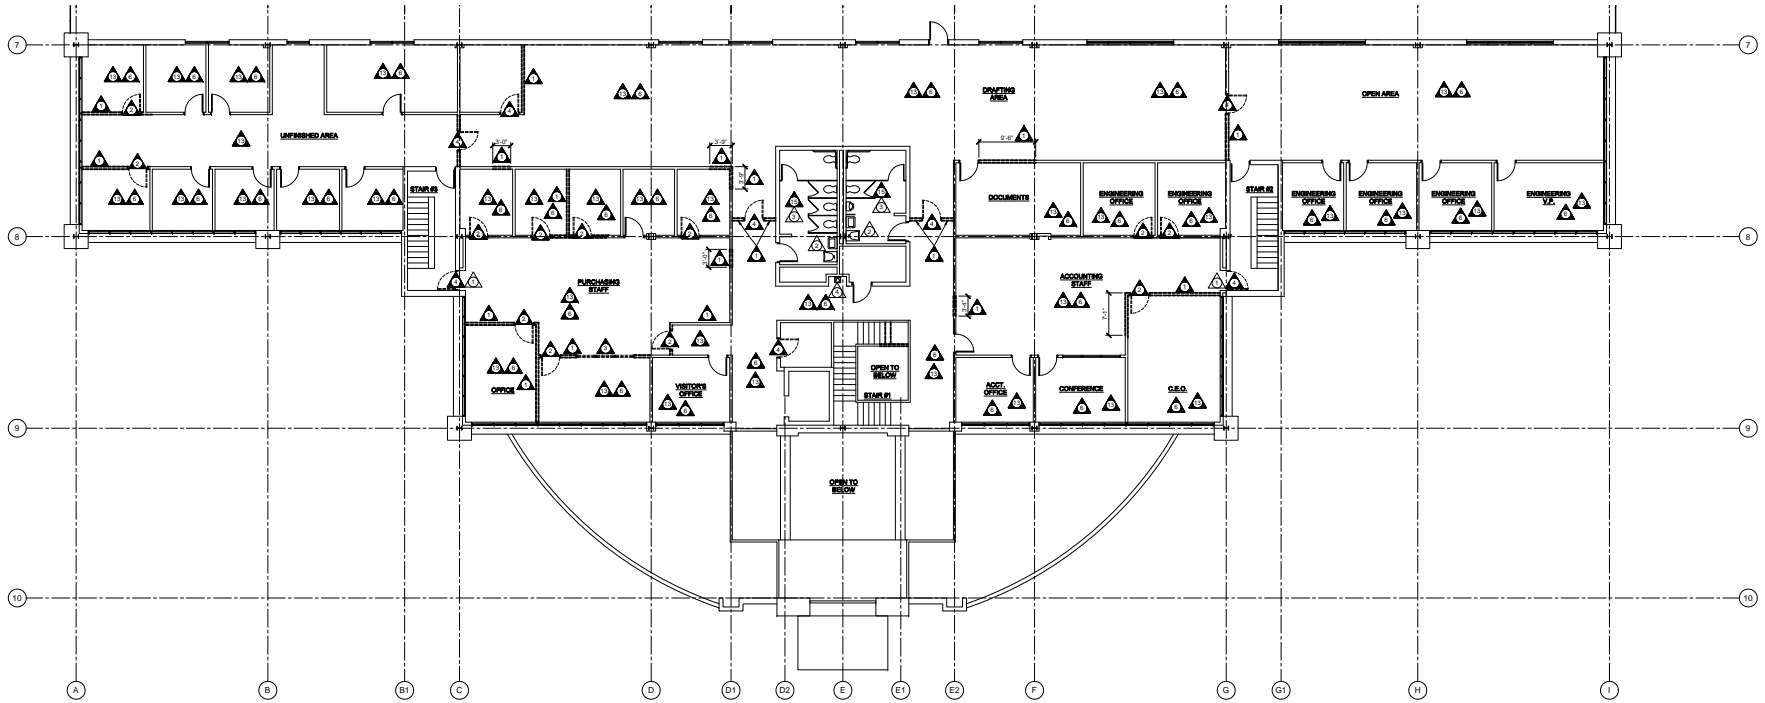

1 SECOND FLOOR DEMOLITION PLAN - AREA "D"  
SCALE: 1/8" = 1'-0"



NO.	DATE	REVISIONS	NO.	DATE	REMARKS
1	11-29-24	ISSUE FOR PERMIT	1		
2			2		
3			3		
4			4		

CONTRACTOR SHALL VERIFY EXISTING CONDITIONS PRIOR TO COMMENCEMENT OF WORK TO VERIFY LIMITS OF WORK. IF CONFLICT EXISTS CONTACT ARCHITECT(S).

ARCHITECTURE  
ENCORPORATING  
RENOVATION

TRICOUNTY  
MULTI-PURPOSE CENTER  
BUILDING ENVELOPE AND  
INTERIOR RENOVATION  
SALISBURY, MARYLAND

TRICOUNTY MULTI-PURPOSE CENTER  
BUILDING ENVELOPE AND  
INTERIOR RENOVATION  
SALISBURY, MARYLAND  
SECOND FLOOR DEMOLITION PLAN - AREA "D"

PRINT DATE: 11/29/24  
DRAWN BY: JTB/BN  
SCALE: AS SHOWN  
PROJECT NO: 2400000000  
PROJECT FILE: 2400000000

**D**  
**104**